
High Performance Moisture Analysis

Accurate Results and Compliance Ready



Accurate Results for All Sample Types

Get highly reliable and repeatable moisture results thanks to fast halogen heating and superior weighing performance with 0.001% moisture content readability.



Increased Safety and Process Control

Define multiple users with individual access rights. Result management and the auto lock-out option increase efficiency while adhering to SOPs and regulations.



Built-In Testing Methods Ensure Performance

Integrated routine testing features ensure the instrument is always performing optimally: FACT, SmartCal, and tests for the heating and weighing unit at the point of use.



Reduced Measurement Time with Results Prediction

The embedded QuickPredict™ function allows you to predict the final result of moisture measurements in a fraction of the usual measurement time. This allows quicker decision making and speeding up of further analysis/process steps.



HX204

Halogen Moisture Analyzer

A high-performance weighing cell with 0.001% moisture content readability separated from the heating source ensures best moisture results even when measuring very low moisture contents. Method flexibility ensures reliable results for any sample type in research, quality control and in-process control. Integrated routine testing and quality management features help to ensure optimal instrument performance and adherence to regulations.


With the HX204 you also get:

- Integrated method development support
- Quick and easy cleaning
- Network connectivity
- Level control
- Simple system integration and automation
- Tailor-made reporting
- ID management
- Control limits



HX204

Halogen Moisture Analyzer

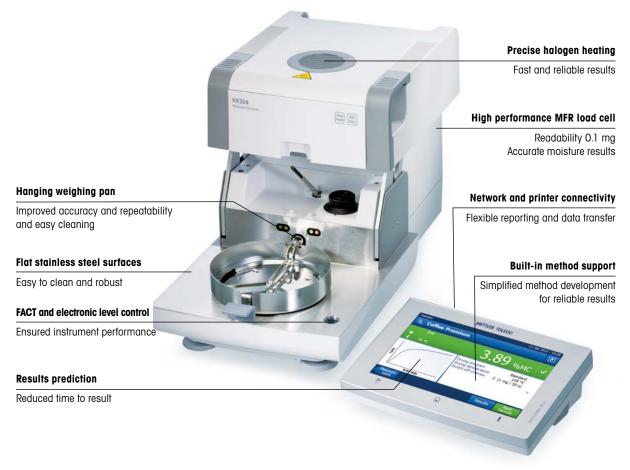

Technical Data

	0.050/	
Repeatability	0.05% with 2 g sample	
	0.01% with 10 g sample	
Drying Programs	Standard, Rapid, Gentle, Steps	
Readability	0.1 mg, 0.001%MC	
Method Memory	300	
Results Storage	3,000	
Recommended %MC	>0.01%	
Results Handling	Control charts, Results overview, Real-time drying curve, QuickPredict, A4 Network printing, Export to file servers, Result management option	
ID Management	10 IDs (entered manually or using a barcode scanner)	
User Management	10 groups with 30 users, auto lock-out function	
Switch-Off Criteria	5 automatic, free, timed (1–480 min)	
Drying Temperature	40-230°C (1°C increments)	
Test and Adjust	Freely definable temperature adjustment (80–200°C)	
	3 rd testing temperature (50–200°C)	
	Internal (FACT) and external weight test (0.1–200 g)	
Display Modes	%MC, %DC, %AM, %AD, g, g/kg MC, g/kg DC, –%MC	
Interfaces	Ethernet, USB device/USB host (2), RS232	
Capacity	201 g	
Method Development	Method Wizard, Test measurement	
Languages	English, German, Farench, Spanish, Italian, Russian, Czech, Hungarian, Portuguese, Chinese, Japanese, Korean, Polish	
Display	7" color touchscreen	

SmartCal™ Test Substance

Material No.
30005917
30005918
30005792
30005793
30005790
30005791

www.mt.com/smartcal





HX204

Moisture Analyzer Power Consumption

Instrument Steady State	Approx. Power Consumption (W)*
Standby	7
100°C	50
160°C	75



^{*} Test results conducted by METTLER TOLEDO under ideal conditions without a sample at 115V and 230V.

Accessories for Moisture Analyzers

		Material No.
Sample Handling	Aluminium sample pans	00013865
	Glass fiber filters	00214464
Quality Management	Certified temperature kit – HX/HS/HC	30020851
	Certified adjustment weight 100 g – HX/HS/HC	30406400
Other Accessories	Protective cover HX/HS	30822726
	Dust filters HX/HS	30020838
	Barcode reader (USB)	30417466
	Support stand HX/HS	30018474
	Printer holder HX/HS	30066692
	EasyDirect Moisture (Data Collection SW)	30522676



Support stand HX/HS; Printer holder HX/HS

METTLER TOLEDO Group

Laboratory Weighing Local contact: www.mt.com/contacts www.mt.com/Moisture _

For more information